

SOKKIA

FX Series
Functional X-ellence Station

Totally Functional

- Windows® CE is Ready in a Lightweight, Compact Body
- MAGNET™ Field On-Board Application Software
- RED-tech Technology Reflectorless EDM
- Long-Range Bluetooth® Technology*
- Advanced Angle Measurement System
- Long-lasting Battery
- Waterproof, Rugged, and Operator Friendly

*Offered as an option in some areas.



The FX Total Station Offers High

World's First
integrated support service

■ TSshield

Every FX total station is equipped with a telematics-based multifunction communications module providing the ultimate security and maintenance capabilities for your investment.

If an activated instrument is lost or stolen, you can send a coded signal to the instrument and disable it – Your total station is secure anywhere in the world!

And, in the same module, you have daily connectivity to cloud-based Sokkia servers that can inform you of available software updates and firmware enhancements.

*For more detail of TSshield, please refer to the TSshield's leaflet.



■ Windows® CE is Ready in a Lightweight, Compact Body

- Windows® CE 6.0 provides a comfortable operating environment.
- Completely new onboard application "MAGNET™ Field" is installed as standard feature.

■ MAGNET™

● Cloud-based Solutions for Precise Positioning*

MAGNET™ is a software family that uses the "cloud" to seamlessly connect data in the field and office. Real-time connections. When you need it. Where you need it. For data exchange, communications, asset tracking and more.

*Available when using an optional controller.


● MAGNET™ Field

Data collection, stakeout, roads, and coordinate geometry.



■ RED-tech Technology Reflectorless EDM


- Fast distance measurement of 0.9s regardless of object.
- Sokkia traditional pinpoint precision in reflectorless distance measurement.
- Reflectorless operation from 30cm to 500m.
- Coaxial EDM beam and laser-pointer provide fast and accurate aiming.
- Ensures accuracy even with reflective sheets.

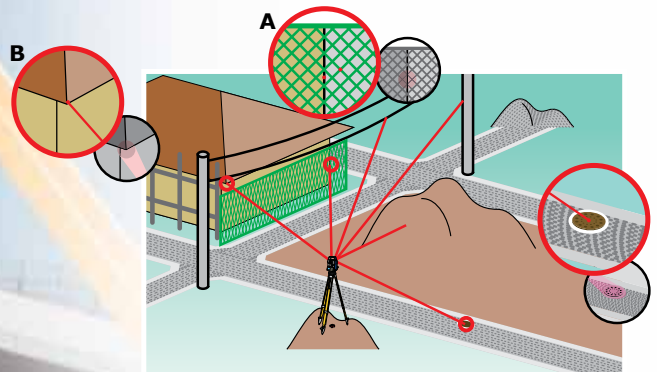

The ultra-narrow EDM beam can precisely measure walls, corners, manholes on the road surface, even chain-link fences and tree branches.

Performance in a Compact Size.

■ Long-Range Bluetooth® Technology*

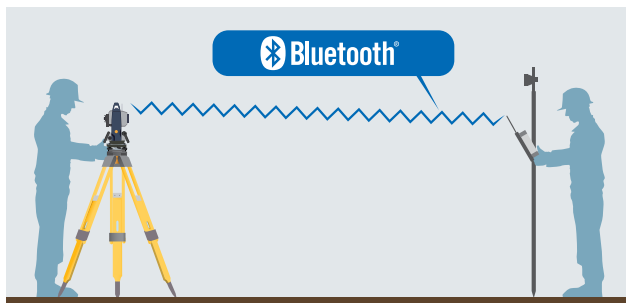


- The FX series of total stations features Bluetooth Class1 wireless technology for reliable data communications.
- All FX data is instantly available at the Bluetooth-equipped controller.

*Offered as an option in some areas.

■ Advanced Angle Measurement System

- FX features Sokkia's original absolute encoders that provide long-term reliability in any job site condition. Dual-axis compensator ensures stable measurements even when setup on uneven terrain.
- Sokkia's traditional motion clamp and tangent screw are employed to ensure stable angle measurement.
- FX-101 and FX-102 feature groundbreaking IACS (Independent Angle Calibration System) technology for extremely reliable angle measurement.



■ Long-lasting Battery

- Uses the same high capacity battery as MDTs and GNSS.
- One battery provides 20 hours of power.



■ Waterproof, Rugged, and Operator Friendly

- IP65 dustproof / waterproof rating.
- Metal chassis and heavy duty handle.
- Standard usage temperature range -20 to +50°C. Low temperature models can be used as low as -30°C^{*2} and high temperature models up to +60°C.^{*2}
- New star key [★] instantly brings up functions.
- Trigger key lets you take a series of measurements without taking your eye off the telescope.
- Control panel consists of 10-key pad with color LCD touch screen display.^{*2}
- USB type A / mini B as well as serial ports.



- Green / Red telescope guide light enhances work efficiency in a range up to 150m.



- Built-in laser plummet with five brightness levels is equipped for quick instrument setting in all lighting conditions.^{*3}

^{*1} Low and High temperature models available as options.

^{*2} Face 2 is only touch screen display. Control panel location may vary depending on region or model.

^{*3} Offered as an option in some areas.

Model		FX-101	FX-102	FX-103	FX-105	FX-107
Telescope						
Magnification / Resolving power		30x / 2.5"				30x / 3.5"
Others		Length: 171mm (6.7in.), Objective aperture: 45mm (1.8in.) (48mm (1.9in.) for EDM), Image: Erect, Field of view: 1°30' (26m/1,000m), Minimum focus: 1.3m (4.3ft.), Reticle illumination: 5 brightness levels				
Angle Measurement						
Display Resolution		0.5" / 1" (0.0001 / 0.0002gon, 0.002 / 0.005mil)	1" / 5" (0.0002 / 0.001gon, 0.005 / 0.02mil)			
Accuracy (ISO 17123-3:2001)		1"	2"	3"	5"	7"
IACS (Independent Angle Calibration System)		Provided		-		
Dual-axis compensator / Collimation compensation		Dual-axis liquid tilt sensor, working range: ±6' (±111mgon) / Collimation compensation available				
Distance Measurement						
Laser output *1		Reflectorless mode: Class 3R / Prism / sheet mode: Class 1				
Measuring range (under average conditions*2)	Reflectorless*3	0.3 to 500m (1.0 to 1,640ft.)				
	Reflective sheet*4/*5	RS90N-K: 1.3 to 500m (4.3 to 1,640ft.) , RS50N-K: 1.3 to 300m (4.3 to 980ft.), RS10N-K: 1.3 to 100m (4.3 to 320ft.)				
	Mini prisms	CP01: 1.3 to 2,500m (8,200ft.), OR1PA: 1.3 to 500m (1,640ft.)				
	One AP prism	1.3 to 4,000m (4.3 to 13,120ft.) / Under good conditions*6: 5,000m (16,400ft.)				
Display Resolution	Three AP prisms	to 5,000m (16,400ft.) / Under good conditions*6: to 6,000m (19,680ft.)				
		Fine/Rapid: 0.001m / 0.01ft. / 1/8in. Tracking: 0.01m / 0.1ft. / 1/2in.				
	Accuracy*2	Reflectorless*3	(3 + 2ppm x D) mm*7			
	(ISO 17123-4:2001) (D=measuring distance in mm)	Reflective sheet*4	(3 + 2ppm x D) mm			
	AP/CP prism	(2 + 2ppm x D) mm				
Measuring time*8		Fine: 0.9s (initial 1.7s), Rapid: 0.7s (initial 1.4s), Tracking: 0.3s (initial 1.4s)				
OS, Interface and Data management						
Operating system / Application		Microsoft Windows® CE 6.0 / MAGNET Field				
Display / Keyboard		3.5inch, Semi-transmissive TFT QVGA color LCD with LED backlight, Touch screen, Automatic brightness control / 26 keys with backlight				
Control panel location*9		On both faces (Face 2 is only touch screen display)				On one face
Trigger key		On right instrument support				
Data storage	Internal memory	500MB internal memory (includes memory for program files)				
	Plug-in memory device	USB flash memory (max. 8GB)				
Interface		Serial RS-232C, USB2.0 (Type A / mini B)				
Bluetooth modem (option)*10		Bluetooth Class 1, Ver.2.1+EDR, Operating range: up to 300m (980ft.)*11				
General						
Laser-pointer*12		Coaxial red laser using EDM beam				
Guide light*12		Green LED (524nm) and Red LED (626nm), Operating range: 1.3 to 150m (4.3 to 490ft.)*2				
Levels	Graphic	6' (Inner Circle)				
	Circular level	10' / 2mm				
Optical plummet		Magnification: 3x, Minimum focus: 0.3m (11.8in.) from tribrach bottom				
Laser plummet (option)		Red laser diode (635nm±10nm), Beam accuracy: ≤1.0mm@1.3m, Class 2 laser product				
Dust and water protection		IP65 (IEC 60529:2001)				
Operating temperature*13		-20 to +50°C (-4 to +122°F)				
Size with handle*9		Control panel on both faces: W191 x D190 x H348mm (W7.5 x D7.5 x H13.7in.) Control panel on one face: W191 x D174 x H348mm (W7.5 x D6.9 x H13.7in.)				
Weight with battery & tribrach		Approx. 5.7kg (12.6 lb.)				
Power supply						
Battery	BDC70 detachable battery	Li-ion rechargeable battery				
Operating time (20°C)	BDC70	Approx. 20 hours (single distance measurement every 30 seconds)				
	External battery*14 (option)	BDC60: approx. 24 hours, BDC61: approx. 49 hours (single distance measurement every 30 seconds)				

*1 IEC60825-1:Ed.2.0:2007 / FDA CDRH 21 CFR Part 1040.10 and 11 *2 Average conditions: Slight haze, visibility about 20km (12 miles), sunny periods, weak scintillation. *3 Fine mode. With Kodak Gray Card White Side (90% reflective). When brightness on measured surface is 30,000 lx. or less. Reflectorless range/accuracy may vary according to measuring objects, observation situations and environmental conditions. *4 When the measuring beam's incidence angle is within 30° in relation to the reflective sheet target. *5 Measuring range in temperatures of -30 to -20°C (-22 to -4°F) with Low Temperature models and 50 to 60°C (122 to 140°F) with High Temperature models: RS90N-K: 1.3 to 300m (4.3 to 980ft.), RS50N-K: 1.3 to 180m (4.3 to 590ft.), RS10N-K: 1.3 to 60m (4.3 to 190ft.) *6 Good conditions: No haze, visibility about 40km (25 miles), overcast, no scintillation. *7 Measuring range: 0.3 to 200m *8 Typical, under good conditions. Reflectorless measurement time may vary according to measuring objects, observation situations and environmental conditions. *9 Control panel location may vary depending on region or model. *10 Usage approval of Bluetooth wireless technology varies according to country. Please consult your local office or representative in advance. *11 No obstacles, few vehicles or sources of radio emissions/interference in the near vicinity of the instrument, no rain. *12 The laser-pointer and the guide light do not work simultaneously. *13 Low Temperature models: -30 to 50 °C (-22 to 122°F) and High Temperature models: -20 to 60°C (-4 to 140°F, No direct sunlight) are available on built-to-order basis. *14 For FX-101, FX-102 and Low Temperature models.

Standard Accessories

- FX main unit
- Battery (BDC70)
- Battery charger (CDC68)
- Power Cable
- Lens cap
- Lens hood
- Tool pouch
- Screwdriver
- Lens brush
- Adjusting pin x2
- Cleaning cloth
- Operation manual
- USB memory
- Laser caution sign-board
- Carrying case
- Carrying strap



- Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.
- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license.
- Other trademarks and trade names are those of their respective owners.
- Designs and specifications are subject to change without notice.
- Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.

SOKKIA

SOKKIA CORPORATION

16900 W. 118th Terrace Olathe, KS 66061
Phone (800) 4-SOKKIA Fax: (913) 492-4900
www.sokkia.com

Specifications subject to change without notice
©2011 Topcon Corporation All rights reserved. P-138-2 GE

Your local Authorized Dealer is: